



2000 PSI Pressure Washer

Owner's Manual



Model No. *PWE2000A*

For Service Please Call Toll Free: 1-866-591-8921

⚠ WARNING ⚠

Read and follow all safety rules and instructions in this manual before attempting to operate this machine. Failure to comply with these instructions may result in personal injury.

Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, the product may differ slightly from the product described herein.

2000 PSI Pressure Washer

Table Of Contents

Topic	Page #
Important Safety Tips, Precautions, Warnings, and Usage Instructions	2-5
Assembly Instructions	6-8
Operating Instructions	8-11
Detergents	11-13
Clean-up and Storage	13-15
Cleaning Tips	15-16
Technical Data	16
Troubleshooting Tips	17
Limited Warranty	18- 19
Parts	20- 26

2000 PSI Pressure Washer

GROUND FAULT CIRCUIT INTERRUPTER (GFCI)

This pressure washer is provided with a ground fault circuit interrupter (GFCI) built into the plug of the power supply cord. This device provides additional protection from the risk of electric shock. Should replacement of the plug or cord become necessary, use only identical replacement parts that include GFCI protection.

This unit is equipped with a Ground Fault Circuit Interrupter (GFCI). When connecting the GFCI to the receptacle, the indicator should appear red. If the indicator is not red, depress the RESET button on the GFCI until the indicator appears red. If the indicator does not appear red, please see Section titled “Troubleshooting” for more information.

IMPORTANT SAFETY TIPS

<p>Never point the high-pressure nozzle at people or animals.</p>
<p>Never drink alcohol or use drugs while operating the pressure washer.</p>
<p>Never operate the pressure washer while standing in water.</p>
<p>Never touch the electrical plug with wet hands.</p>
<p>Never let the electrical connections rest in water.</p>
<p>Never operate the pressure washer without the water turned on.</p>
<p>Never use hot water with this pressure washer.</p>

2000 PSI Pressure Washer

IMPORTANT SAFETY PRECAUTIONS

WARNING: When using this product, basic precautions should always be followed, including the following:

1.	Read all instructions before using the product. Save all safety instructions.
2.	Do not operate the pressure washer when fatigued or under the influence of alcohol or drugs.
3.	Risk of infection or injury – do not direct the high pressure water stream at any people or animals.
4.	Do not allow children to operate the pressure washer at any time.
5.	To reduce the risk of injury, close supervision is necessary when the pressure washer is used near children.
6.	Know how to stop the unit and reduce pressure immediately. Be completely familiar with the controls.
7.	Stay alert – always be aware of where you are directing the high pressure spray
8.	Keep cleaning area clear of all people.
9.	Maintain safe footing and balance at all times – do not overreach or stand on an unstable support.
10.	The work area should have adequate drainage to reduce the possibility of a fall due to slippery surfaces.
11.	Follow the maintenance instructions specified in the manual.
12.	To reduce the risk of electrocution, keep all connections dry and off the ground. Do not touch the plug with wet hands.

GENERAL SAFETY PRECAUTIONS

1.	Intended for outdoor household use only.
2.	High-pressure hose can develop leaks from wear, abuse, kinking etc. Do not use a damaged hose.
3.	Do not use the pressure washer in areas near combustible materials, combustible fumes, or dust.
4.	Some chemicals or detergents may be harmful if inhaled or ingested causing severe injury. Use a respirator or mask whenever there is a chance that vapors may be inhaled.

2000 PSI Pressure Washer

	Read all instructions included with the mask so you are certain the mask will provide the necessary protection against inhaling harmful vapors.
5.	Before starting the pressure washer in cold weather, check all of the parts of the equipment and be sure that ice has not formed. Do not store the unit anywhere that the temperature will fall below 0°C (32°F).
6.	DO NOT MAKE ANY MODIFICATIONS TO ANY OF THE COMPONENTS! Units with broken or missing parts, or without the protective housing or covers should NEVER be operated
7.	Keep the high-pressure hose connected to the pressure washer and the spray gun while the system is pressurized. Disconnecting the hose while the unit is pressurized is dangerous, and may cause injury.
8.	Do not leave the pressure washer unattended while the power switch is ON.
9.	Keep the water spray away from electrical wiring or fatal electric shock may result.

SERVICING OF A DOUBLE-INSULATED APPLIANCE

In a double-insulated product, two systems of insulation are provided instead of grounding. No means of grounding is provided on a double-insulated product, nor should a means for grounding be added to the product. Servicing a double-insulated product requires extreme care and knowledge of the system, and should be done only by qualified service personnel. Replacement parts for a double-insulated product must be identical to the parts they replace. A double-insulated product is marked with the words “DOUBLE INSULATION” or “DOUBLE INSULATED”. This symbol  may also be marked on the product.

USE OF EXTENSION CORDS

Use of an extension cord with this product is **NOT RECOMMENDED**. If you must use an extension cord, use only extension cords that are intended for outdoor use. These cords are identified by a mark ing “ACCEPTABLE FOR USE WITH OUTDOOR APPLIANCES, STORE INDOORS WHILE NOT IN USE.” Use only extension cords having an

2000 PSI Pressure Washer

electrical rating not less than the rating of the product. Examine the extension cord before use. Do not use damaged extension cords! Do not pull on cord to disconnect from the receptacle. Always disconnect by pulling on plug. Keep the cord away from heat and sharp edges. Always disconnect the extension cord from the receptacle before disconnecting the product from the extension cord.

WARNING – To reduce the risk of electrocution, keep all connections dry and off the ground. Do not touch the plug with wet hands.

PROPER USE OF THE PRESSURE WASHER

***THIS UNIT IS INTENDED FOR USE WITH COLD WATER ONLY!
DO NOT USE HOT WATER IN THIS PRESSURE WASHER.***

1.	Operate the pressure washer at no more than the fluid pressure rated for the pressure washer. Never run the pressure washer without a water supply. Running the unit without a water supply will cause irreparable damage to the unit.
2.	Make sure that the water supply you use for the pressure washer is not dirty, sandy, and does not hold any corrosive chemical products. Using a dirty water supply will compromise the life of the pressure washer.
3.	CAUTION - The pressure washer can be used for a variety of applications including washing cars, boats, patios, decks, garages etc. where high pressure is necessary to remove dirt and debris. High-pressure water flow can damage the work surface if not used properly! See the section titled “Operating Instructions” for more details. Always test the spray in an open area first.
4.	NEVER move the unit by pulling on the high pressure hose. Use the handle provided on the top of the unit.
5.	Always hold the high pressure gun and wand with two hands. Keep one hand on the gun/trigger, while supporting the wand with the other hand (see diagram).
6.	When dispensing detergent, the pressure washer applies detergent to the cleaning area at low pressure only. Once the detergent has been applied, spray the detergent off of the work area by using the adjustable nozzle.


2000 PSI Pressure Washer

ASSEMBLY INSTRUCTIONS

Unpacking The Carton

After opening the carton, please remove all parts and check them against the following list of components that are included:

- A. High Pressure Washer
- B. Gun
- C. High Pressure Hose
- D. 4 IN 1 Lance Adjustable Nozzle
- E. Two-way Connector
- F. Water Intake Filter (Pre-Installed)
- G. Detergent Bottle
- H. Accessories Holder

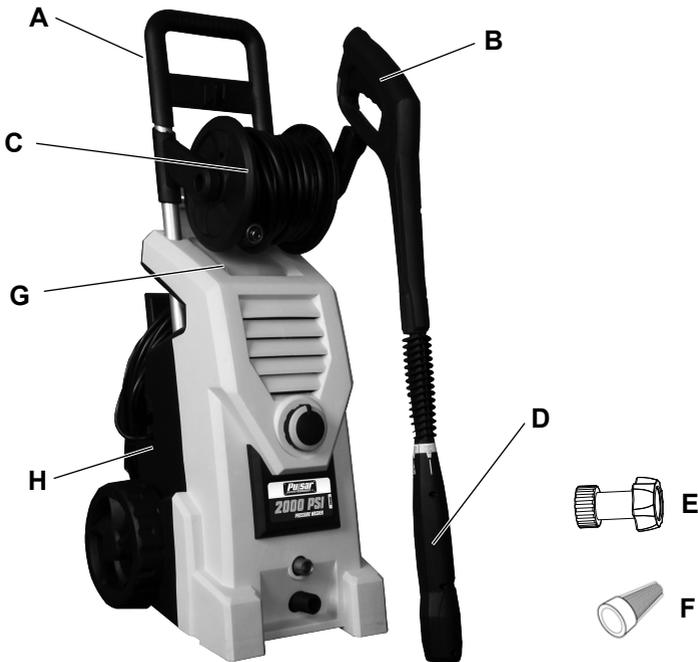

To assemble the enclosed parts, please refer to the steps that follow:

2000 PSI Pressure Washer


Step 1

To attach the power washer storage hook to the back of the machine, firstly align the hole. Then using the 3 screws provide and a screwdrive (no supplied), screw the storage hook to the back of the power washer.




Step 2

Take the hose lock to position A to unlock. Attach the high pressure hose to the gun. Then push the hose lock to position B to lock the fitting.

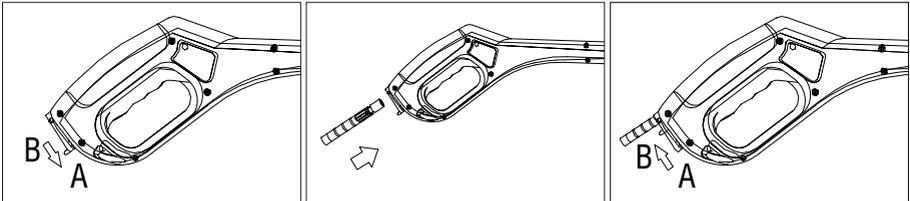

Step 3



Insert the adjustable spray nozzle into the gun. Push and turn the adjustable nozzle clockwise onto the gun until it is hand tight and to lock it in place. When the pieces are joined properly, you cannot separate the two components by pulling out on the adjustable nozzle. All attachments must be inserted into the gun for proper use.

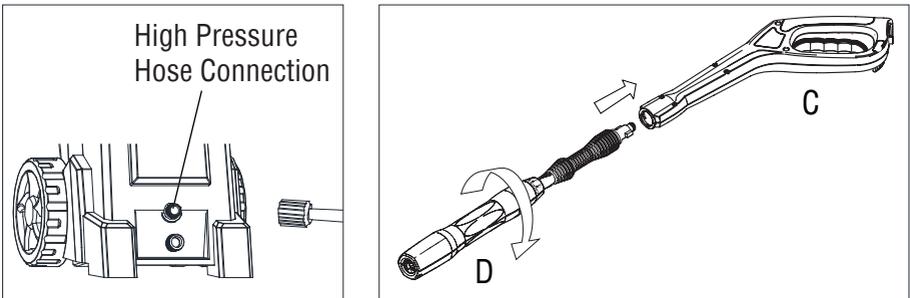

2000 PSI Pressure Washer

Step 4

Attach the hose connector to pressure washer. Before attaching the connector to the male fitting, remove the plastic cap, which is inserted onto the male fitting on the pressure washer before shipping. This plastic cap can be discarded once removed. After both components have been installed, attach the garden hose with connector screw on the pressure washer. Connect the garden hose to the waterspout.




OPERATING INSTRUCTIONS

***THIS UNIT IS INTENDED TO BE USED WITH COLD WATER ONLY!
DO NOT USE HOT WATER IN THIS PRESSURE WASHER!***

Starting Up

After connecting the pressure washer to your cold water supply, proceed as follows:

- Make sure that the on/off switch is in the off position.
- Connect the garden hose with a quick connect to the inlet fitting.
- Attach the hose to the gun as per assembly instruction step #1.
- Insert the adjustable spray nozzle into the gun as per assembly step #2.



2000 PSI Pressure Washer

- Connect the high pressure hose to the high pressure outlet fitting as per assembly step 2 and step 4.
- Open the water supply valve completely.
- Before turning the unit on, press the gun trigger to bleed all the remaining air out of the pump and hose.
- Start the pressure washer by turning the on/off switch to the on position and squeeze the trigger.

REMINDER: The motor does not run continuously, only when the trigger is squeezed.

WARNING – Risk injury the unit will start spraying when trigger is squeezed. When turning the unit off after use, high pressure still exists inside the hose and unit. Point the gun in a safe direction and discharge the excess pressure. NEVER direct the high pressure water stream at people or animals.

Automatic On / Off

The pressure washer is equipped with an automatic on/off switch. The pressure washer will only run when the power switch is in the ON position and the trigger on the gun is squeezed. When you release the trigger to stop spraying water through the gun, the motor on the pressure washer will automatically shut off. Simply squeeze the trigger again to resume using the washer. To stop using the pressure washer, release the trigger and switch the unit to the OFF position. The unit should be turned completely OFF while not in use or while unattended.

Bleeding The Gun

It is very important to bleed all the air out of the pressure washer before using it. To do this

1. Release trigger lock.
2. Squeeze the trigger before turning the electrical supply on. This removes any air trapped inside the pressure washer and lance before using the units.
3. Continue holding trigger for approximately one minute to allow any excess air out of the unit. Water will flow through the gun at low pressure during this procedure.
4. Lock the trigger.
5. Plug the power cord into the electrical outlet.
6. Release the trigger lock.
7. Turn the ON/OFF switch clockwise to the I/ON position.

The pressure washer is ready for operation.


2000 PSI Pressure Washer

Gun Safety Lock

This pressure washer is equipped with a gun trigger safety lock. When not using the pressure washer, use the safety lock to protect from accidentally engaging the high pressure spray.

Adjustable Spray Nozzle

The 4 IN 1 adjustable nozzle will allow you to use a variety of spray patterns from a full fan spray to other spray. When using the pressure washer to clean wood decks, siding, vehicles etc., always start using the fan spray and begin spraying from a minimum 36" away to avoid damaging the surface of the material you are cleaning. Always begin by spraying in a test area free and clear of people and objects.

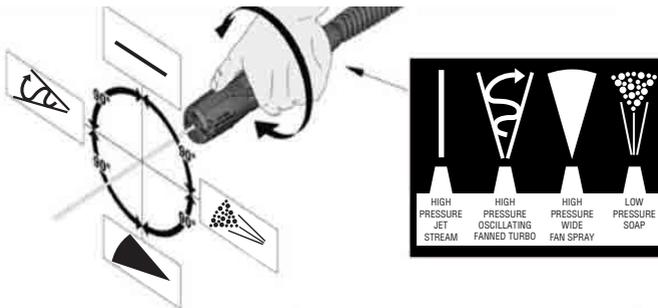

Dispensing Detergent

The built-in detergent dispenser will allow you to apply liquid detergent onto the work surface. Detergent application happens at low-pressure only. Insert the adjustable nozzle onto the gun, and turn it to “LOW PRESSUER SOAP” so that the pressure washer is in low-pressure mode (see Figure A below). Remove the cap on the detergent reservoir and fill with liquid detergent only (see Figure B below). Do not put any water into the reservoir. The pressure washer will mix water and detergent automatically. When finished applying the detergent to the work surface, turn it to “HIGH PRESSURE” of the adjustable nozzle and spray off the detergent by using the high-pressure spray (see Figure A below). In high-pressure mode, the pressure washer will not dispense detergent.

2000 PSI Pressure Washer

FIGURE A

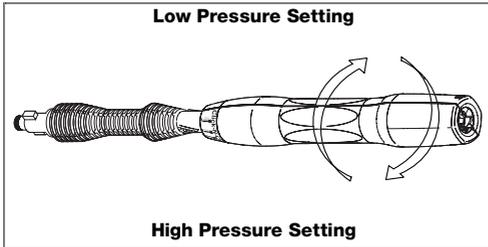



FIGURE B



ADJUSTING THE PRESSURE

To adjust the pressure, proceed as follows:

1. Hold the shaft of the lance in one hand.
2. Turn the grey part of the nozzle clockwise to obtain the high pressure.
3. Turn the grey part of the nozzle anticlockwise to obtain the low pressure.



AUTO STOP SYSTEM

The pressure washer is fitted with an automatic stop system to protect the motor when in use.

When the trigger is released the motor will stop.

When the trigger is squeezed the motor will start up again.

USING DETERGENTS

The pressure washer will dispense detergent only at low pressure.

Use the adjustable spray nozzle to apply detergents and to rinse clean.

Biodegradable detergents are specifically formulated to protect the environment and your pressure washer. These Detergents will not clog the filter and will protect the internal parts of the pressure washer for a longer life.

2000 PSI Pressure Washer



Step 1

Open the cover of the detergent reservoir by twisting it off.


Step 2

Fill the detergent reservoir with any approved liquid detergent. Close the cover.

Step 3

Turn the adjustable nozzle to end of “LOW PRESSURE SOAP”, put the pressure into low-pressure mode.

Low Pressure Setting

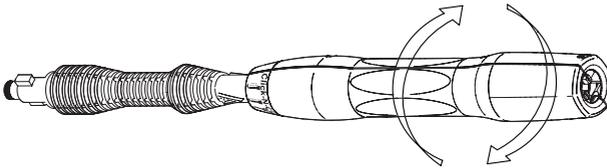

Step 4


To apply the detergent to your work area. Turn the pressure washer switch to the ON position. Pull the trigger to operate the unit. The pressure washer will mix the detergent with water. Do not allow the detergent to dry on the object that you are cleaning.

WARNING: NEVER USE PRODUCTS WITH BLEACH OR CHLORINE OR ANY OTHER CORROSIVE MATERIALS, INCLUDING LIQUIDS CONTAINING SOLVENTS (I.E. GAS, OILS ETC), TRI-SODIUM PHOSPHATE PRODUCTS, AMMONIA, OR ACID-BASED CLEANERS. THESE CHEMICALS WILL HARM THE UNIT AND CAUSE DAMAGE TO THE SURFACE BEING CLEANED. ALWAYS READ THE LABEL.

Step 5

To clean the working area, turn the adjustable nozzle to end of “HIGH PRESSURE”, return it to high-pressure mode. Spray high-pressure water onto the work area to rinse off the work area and any remaining detergent.

2000 PSI Pressure Washer

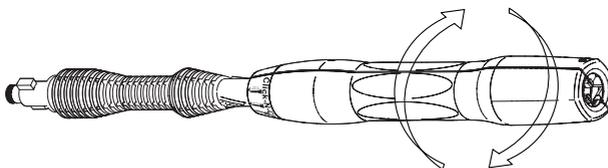


High Pressure Setting

CLEAN-UP AND STORAGE

Shutting Down the Pressure Washer

WHEN FINISHED USING THE PRESSURE WASHER, FOLLOW THESE STEPS TO SHUT DOWN THE UNIT:

- Turn the pressure washer to the OFF position.
- Turn off the water supply.
- Before disconnecting high-pressure hose connection, point the gun in a safe direction and discharge the high-pressure water.
- Disconnect high-pressure hose from the pressure washer and gun.
- Disconnect garden hose from the pressure washer.
- Remove excess water from the pump by tipping the unit on both sides to drain any remaining water from the inlet and outlet fittings.
- Remove the Water Intake Filter and flush with water to remove dirt or debris. Return the filter once it is cleaned.



2000 PSI Pressure Washer

- Drain the detergent reservoir and flush with running water.
- Wipe away any remaining water on all parts and fittings.
- Engage the gun safety lock.
- Store the pressure washer, parts, and accessories in an area with a temperature above 0°C (32°F).

Winterizing and Long-Term Storage

FOLLOW ALL OF THE ABOVE SHUT-DOWN PROCEDURES, ADDING THE FOLLOWING STEPS....

- After disconnecting the water supply, and before disconnecting the high-pressure hose, turn the pressure washer on for 2-3 seconds, until any remaining water in the pump exits. Turn the unit off immediately.

CONTINUED USE OF THE PRESSURE WASHER WITHOUT THE WATER SUPPLY ATTACHED WILL CAUSE SEVERE DAMAGE TO THE UNIT!


- Always store the pressure washer, parts, and accessories in an area with a temperature above 0° C (32° F).

WARNING: FAILURE TO COMPLY WITH THESE STORAGE INSTRUCTIONS WILL RESULT IN DAMAGE TO THE PUMP ASSEMBLY.

Maintenance

- This pressure washer is supplied with a closed lubrication system, so no addition of oil is needed.
- Check all hoses and accessories for damage prior to use.
- Check the water intake filter periodically for deposits. Clean this filter regularly for maximum performance.

2000 PSI Pressure Washer



CLEANING TIPS

WARNING: ALWAYS TEST THE SPRAY IN AN AREA FREE AND CLEAR OF PEOPLE AND OBJECTS BEFORE YOU AIMING AT THE INTENDED CLEANING SURFACE.

Wood and Vinyl Decks

Rinse deck and surrounding area with fresh water. If using detergent, fill the detergent reservoir and apply to the area being cleaned at low pressure. For optimal results, reduce your work area to smaller sections and clean each section one at a time. Allow the detergent to rest on the surface for a few minutes and then rinse at high pressure. Do not let the cleanser dry. Always clean from left to right and top to bottom for best results. Rinse at high pressure using the fan spray keeping the tip of the spray nozzle at least 6-9 inches from the cleaning surface. Maintain a further distance from the cleaning area when using a direct spray.

Caution: For softer woods, increase the distance from the cleaning area.

Cement Patios, Stone, and Brick

Rinse the area with fresh water. If using detergent, fill the detergent reservoir and apply to the area being cleaned at low pressure. Rinse at high pressure using the fan spray in a sweeping motion keeping the tip of the spray nozzle at least 3-6 inches from the cleaning surface. Maintain a further distance from the cleaning area when using a direct spray.

2000 PSI Pressure Washer

Cars, Boats, and Motorcycles

Rinse the area with fresh water. If using detergent, fill the detergent reservoir and apply to the area being cleaned at low pressure. To achieve the best results, clean one side at a time. Allow the detergent to remain on the surface for a few minutes, but do not let the detergent dry. Rinse at high pressure using the fan spray in a sweeping motion keeping the tip of the spray nozzle at least 8 inches from the cleaning surface. Maintain a greater distance from the cleaning area when using a direct spray. Wipe the surface dry for a polished finish.

Barbecue Grills, Power Equipment, and Garden Tools

Rinse the area with fresh water. If using detergent, fill the detergent reservoir and apply to the area being cleaned at low pressure. Allow the detergent to remain on the surface for a few minutes, but do not let the detergent dry. Rinse at high pressure using the fan spray keeping the tip of the spray nozzle at least 1-3 inches from the cleaning surface. Maintain a greater distance from the cleaning area when using a direct spray.

TECHNICAL DATA

Main voltage	120 V
Main frequency	60 Hz
Max. operating pressure	2000PSI
Water consumption	1.6 GPM
Max. pressure water supply	40-80PSI
Max. water temperature	40-140F(5-60°C)
Weight	26LBS

WARRANTY

Refer to the enclosed warranty regarding conditions for the terms and conditions of guarantte.

ENVIRONMENT

Should your machine need replacement after extended use, please do not dispose with regular wash but dispose of it in an environmentally safe way.

2000 PSI Pressure Washer

TROUBLESHOOTING TIPS

WHEN THE SWITCH IS IN THE "I" POSITION THE MACHINE WILL NOT START

PROBABLE CAUSE

Electrical socket is faulty
Voltage is inadequate
GFCI trips
Power cord is not plugged in

SOLUTION

Check plug, socket, and fuses
Check that the voltage is adequate
Reset / Try another outlet
Plug in power cord

THE PUMP DOES NOT REACH ADEQUATE PRESSURE OR FLUCTUATES

PROBABLE CAUSE

Water Intake Filter is clogged
Pump is drawing air
Suction valves are clogged/worn
Diameter of garden hose too small
Water supply is restricted
Insufficient water supply

SOLUTION

Remove and clean filter
Tighten connections/bleed system
Clean or replace valves
Replace to 1" inch garden hose
Check hose for kinks or leaks
Fully open the water source

THE PRESSURE WASHER HAS OR WILL NOT MAINTAIN PRESSURE

PROBABLE CAUSE

Excessive air in waterline and pump

SOLUTION

Turn unit and water supply off / and bleed lines

THE PRESSURE WASHER MAKES EXCESSIVE NOISE

PROBABLE CAUSE

Intake is blocked
Valves are worn, dirty, or clogged
Water Intake Filter is dirty

SOLUTION

Check the intake valves
Check, clean or replace valves
Check, clean, or replace filter

THE MOTOR STOPS RUNNING WHILE IN USE

PROBABLE CAUSE

Net voltage lower than suggested

SOLUTION

Check to determine that the voltage is adequate

2000 PSI Pressure Washer

LIMITED WARRANTY

Pulsar Products, Inc. warrants to the original purchaser who uses the product in a consumer application (personal, residential or household usage) that all products covered under this warranty are free from defects in material and workmanship for one year from the date of purchase. All products covered by this limited warranty which are used in commercial applications (i.e. income producing) are warranted to be free of defects in material and workmanship for 90 days from the date of original purchase. Products covered under this warranty include air compressors, air tools, service parts, pressure washers and generators.

Pulsar Products, Inc. will repair or replace, at Pulsar Products, Inc.'s sole option, products or components which have failed within the warranty period. Service will be scheduled according to the normal work flow and business hours at the service center location, and the availability of replacement parts. All decisions of Pulsar Products, Inc. with regard to this limited warranty shall be final.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

RESPONSIBILITY OF ORIGINAL PURCHASER(initial User):

To process a warranty claim on this product, DO NOT return item to the retailer. The product must be evaluated by an Authorized Warranty Service Center. For the location of the nearest Authorized Warranty Service Center contact the retailer or place purchase.

Retain your original cash sales receipt as proof of purchase for all warranty work.

Use reasonable care in the operation and maintenance of the product as described in the Owner's Manual(s).

Deliver or ship the product to the Authorized Warranty Service Center. Freight costs, if any must be paid by the purchaser.

If the purchaser does not receive satisfactory results from the Authorized Warranty Service Center, the purchaser should contact Pulsar Products, Inc..

2000 PSI Pressure Washer


LIMITED WARRANTY (cont'd)

THIS WARRANTY DOES NOT COVER:

- Merchandise sold as reconditioned, used as rental equipment, or floor or display models.
- Merchandise that has become damaged or inoperative because of ordinary wear, misuse, cold, heat, rain, excessive humidity, freeze damage, use of improper chemicals, negligence, accident, failure to operate the product in accordance with the instructions provided in the Owner's Manual(s) supplied with the product, improper maintenance, the use of accessories or attachments not recommended by Pulsar Products, Inc., or unauthorized repair or alterations.
- Repair and transportation costs of merchandise determined not to be defective.
- Costs associated with assembly, required oil, adjustments or other installation and start-up costs.
- Expendable parts or accessories supplied with the product which are expected to become inoperative or unusable after a reasonable period of use.
- Merchandise sold by Pulsar Products, Inc. which has been manufactured by and identified as the product of another company, such as gasonline engines. The product manufacturer's warranty, if any, will apply.
- ANY INCIDENTAL, INDIRECT OR CONSEQUENTIAL LOSS, DAMAGE, OR EXPENSE THAT MAY RESULT FROM ANY DEFECTS, FAILURE OR MALFUNCTION OF THE PRODUCT IS NOT COVERED BY THIS WARRANTY. Some states do not allow this exclusion, so it may not apply to you.
- IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO ONE YEAR FROM THE DATE OF ORIGINAL PURCHASE. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

2000 PSI Pressure Washer

EXPLODER VIEW

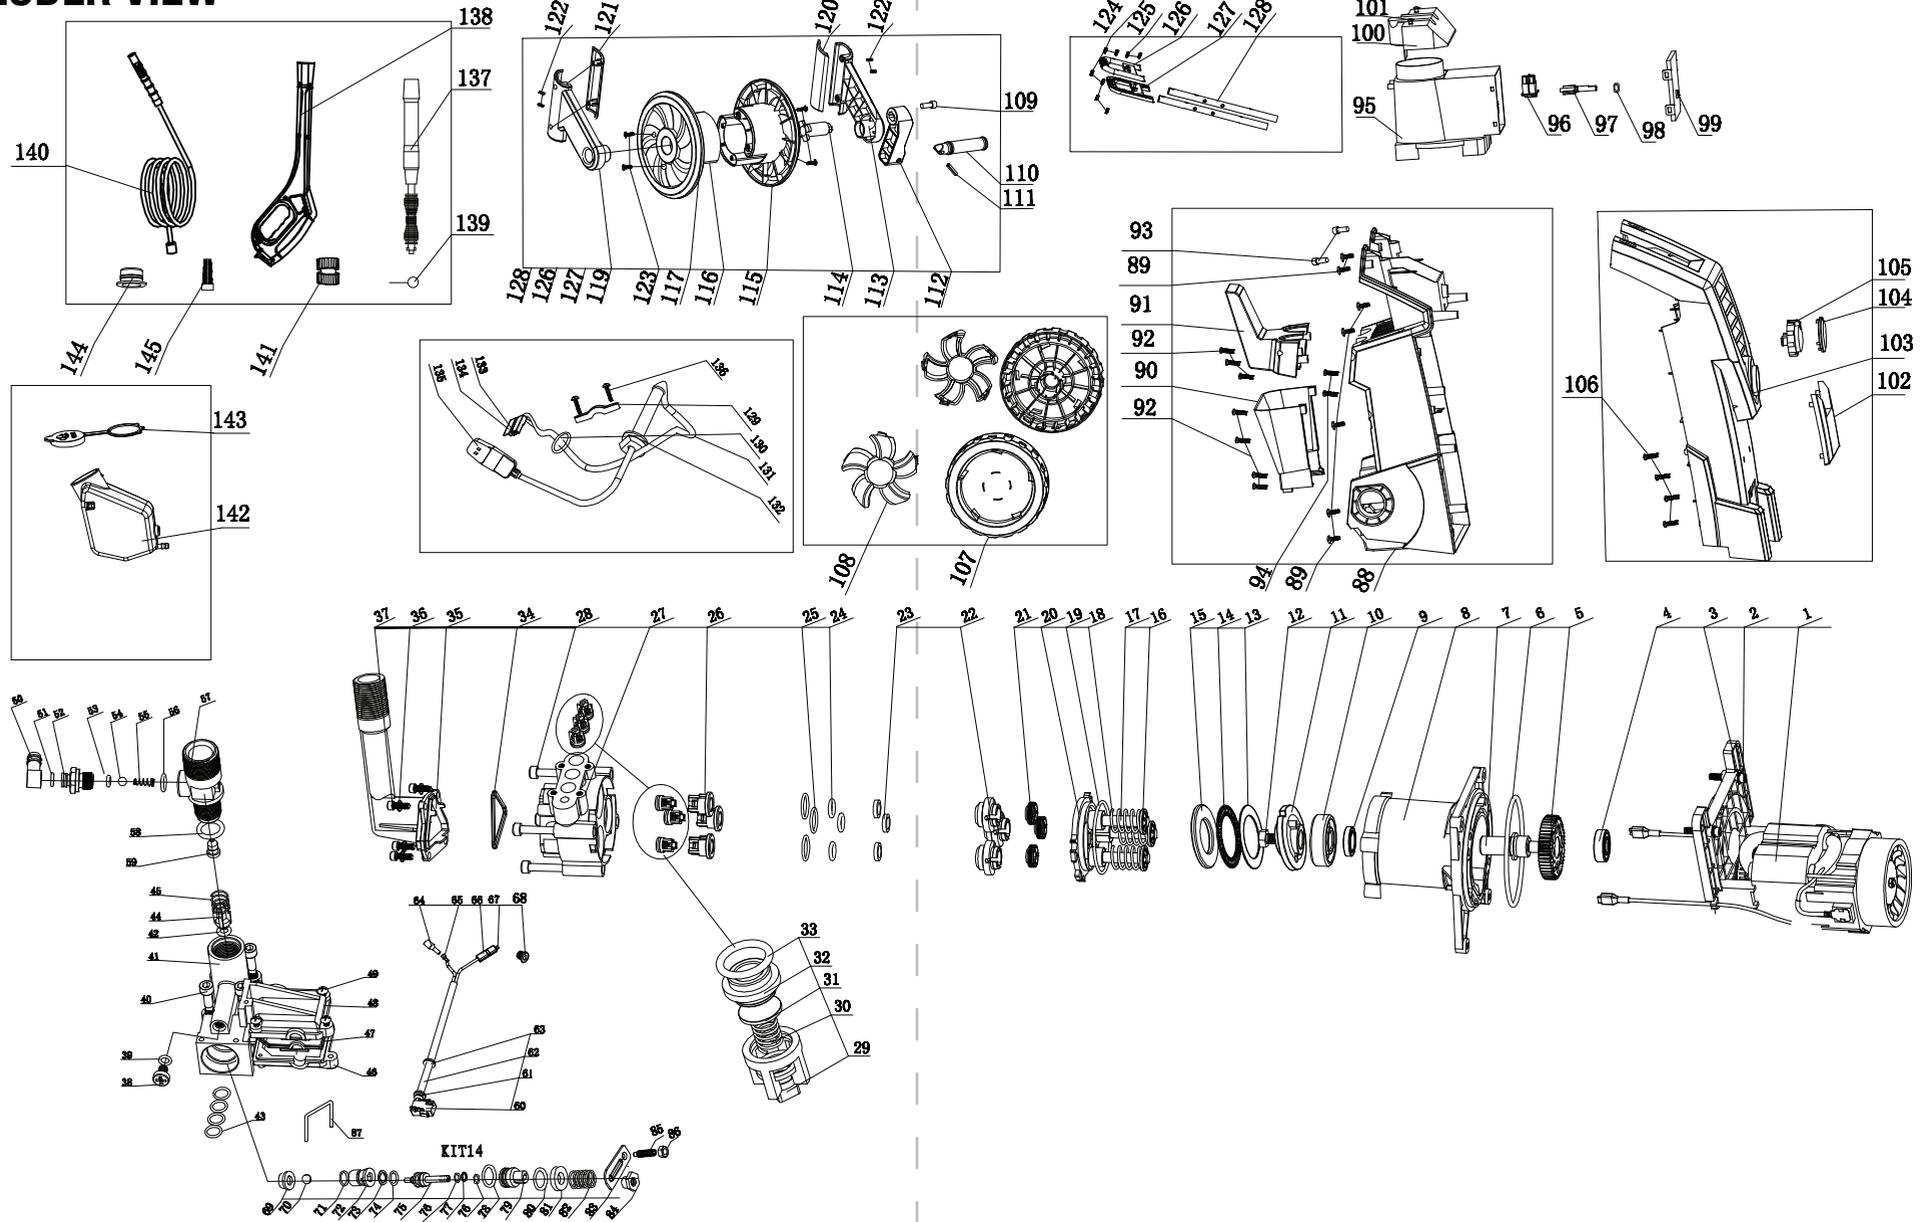

2000 PSI Pressure Washer

2000 PSI Pressure Washer

MPG Assy

Parts No.	DESCRIPTION	QTY.
Moto Assy		
PWE2000A-1	Moto	1
PWE2000A-2	Hexagon Socket Head Cap Screw	4
PWE2000A-3	Plain Washer	4
PWE2000A-4	Deep Groove Ball Bearing	1
Pump Pedestal Assy		
PWE2000A-5	Big Gear	1
PWE2000A-6	O-Ring 64.77x2.62	1
PWE2000A-7	Gear Shaft	1
PWE2000A-8	Pump Pedestal	1
PWE2000A-9	Oil Seal	1
PWE2000A-10	Deep Groove Ball Bearing	1
PWE2000A-11	Wobble Plate 11°	1
PWE2000A-12	Wobble Plate Screw (Left)	1
Thrust Bearing Assy		
PWE2000A-13	Thrust Bearing Thin Board	1
PWE2000A-14	Thrust Bearing Roller	1
PWE2000A-15	Thrust Bearing Thick Board	1
Piston Body Assy		
PWE2000A-16	Spring Base	3
PWE2000A-17	Piston	3
PWE2000A-18	Piston Spring	3
PWE2000A-19	Shaped-Ring 64.77x2.62	1
PWE2000A-20	Piston Body	1
PWE2000A-21	Oil Seal	3
Pilot Sheath Assy		
PWE2000A-22	Pilot Sheath	3
PWE2000A-23	Water Seal	3
Pump Body Assy		
PWE2000A-24	Small O-Ring 17x2.0	3
PWE2000A-25	Big O-Ring 23x2.62	3
PWE2000A-26	One Way Valve Cover	3
PWE2000A-27	Pump Body	1
PWE2000A-28	Hexagon Socket Head Cap Screw M6x55	4
One-Way Valve Assy		

2000 PSI Pressure Washer

MPG Assy

Parts No.	DESCRIPTION	QTY.
PWE2000A-29	One-Way Valve Seat	6
PWE2000A-30	One-Way Valve Spring	6
PWE2000A-31	One-Way Valve Door	6
PWE2000A-32	One-Way Valve Cover	6
PWE2000A-33	One-Way Valve Cover O-Ring 9x1.8	6

Inlet Assy

PWE2000A-34	O-Ring	1
PWE2000A-35	Inlet Tube	1
PWE2000A-36	Plain Washer	4
PWE2000A-37	Hexagon Socket Head Cap Screw M5x16	4

Mainifold Assy

PWE2000A-38	Slotted Cheese Head Screws	1
PWE2000A-39	Small O-Ring	1
PWE2000A-40	Hexagon Socket Head Cap Screw M5x35	4
PWE2000A-41	O-Ring 12x2.0	4
PWE2000A-42	Manifold	1
PWE2000A-43	O-Ring 5x2.0	1
PWE2000A-44	One-Way Valve Covre	1
PWE2000A-45	One-Way Valve Covre Spring	1
PWE2000A-46	TSS Switch Socket Cover	1
PWE2000A-47	TSS Switch Cover Sealing Gasket	1
PWE2000A-48	TSS Switch Socket	1
PWE2000A-49	Cross Pan Head Self-Tapping Screw SJ3x12	4

Self-Priming Assy

PWE2000A-50	Joint Sleeve	1
PWE2000A-51	Small O-Ring	1
PWE2000A-52	Soap Joint	1
PWE2000A-53	Small O-Ring	1
PWE2000A-54	Steel Ball	1
PWE2000A-55	Taper Spring	1
PWE2000A-56	Big O-Ring	1
PWE2000A-57	Self-Priming Outlet Pipe	1
PWE2000A-58	O-Ring	1
PWE2000A-59	Venturi Nozzle	1

Tss Assy

2000 PSI Pressure Washer

MPG Assy

Parts No.	DESCRIPTION	QTY.
PWE2000A-60	TSS Switch	1
PWE2000A-61	TSS Round Jacket	1
PWE2000A-62	Cable Jacket	1
PWE2000A-63	TSS Lead Wire	1
PWE2000A-64	Plastic Jacket (Soft)	1
PWE2000A-65	Receptacle	1
PWE2000A-66	Plastic Square Jacket (Soft)	1
PWE2000A-67	Plate (Line)	1
PWE2000A-68	Lever Sheath	1
PWE2000A-69	Steel Ball Cover	1
PWE2000A-70	Steel Ball	1
PWE2000A-71	O-Ring	1
PWE2000A-72	Spill Valve Sheel	1
PWE2000A-73	Valve Core Big Baffle Ring	1
PWE2000A-74	O-Ring	1
PWE2000A-75	Spill Valve Sheel	1
PWE2000A-76	O-Ring	2
PWE2000A-77	Valve Core Little Baffle Ring	1
PWE2000A-78	O-Ring	1
PWE2000A-79	Spill Valve Core	1
PWE2000A-80	O-Ring	1
PWE2000A-81	Valve Sheath Baffle Ring	1
PWE2000A-82	Spill Valve Spring	1
PWE2000A-83	Lever	1
PWE2000A-84	Lever Nut	1
PWE2000A-85	Link Lever	1
PWE2000A-86	Link Lever Nut	1
PWE2000A-87	U-Pin	1
Back Housing Assy		1
PWE2000A-88	Back Housing	1
PWE2000A-89	Cross Pan Head Tapping Screw	14
PWE2000A-90	Back Cover Accessory	1
PWE2000A-91	Water Gun Rack	1
PWE2000A-92	Cross Pan Head Tapping Screw	9
PWE2000A-93	Hexagon Socket Head Cap Screw	2

2000 PSI Pressure Washer

Complete Machine

Parts No.	DESCRIPTION	QTY.
PWE2000-A94	Cross Pan Head Self-Tapping Screw	2
Motor Cover Assy		
PWE2000A-95	Motor Cover	1
PWE2000A-96	ON/OFF Main Switch With Shiled	1
PWE2000A-97	Switch Cover	1
PWE2000A-98	O-Ring	1
PWE2000A-99	Switch Cover	1
PWE2000A-100	Cap Of Motor Cover	1
PWE2000A-101	Cross Pan Self-Tapping Screw	2
Front Housing Assy		
PWE2000A-102	Front Palet	1
PWE2000A-103	Front Housing	1
PWE2000A-104	Knob Cover	1
PWE2000A-105	Knob	1
PWE2000A-106	Cross Pan Self-Tapping Screw	4
Wheel Assy		
PWE2000A-107	Wheel	2
PWE2000A-108	Wheel Cover	2
Hose-Reel Assy		
PWE2000A-109	Hexagon Socket Head Cap Screw	1
PWE2000A-110	Hose Reel Holder	1
PWE2000A-111	Hose Reel Bolt	1
PWE2000A-112	Hose Reel ASSY II	1
PWE2000A-113	Hose Reel Big Stents (Left)	1
PWE2000A-114	Hose Reel ASSY I	1
PWE2000A-115	Hose Reel	1
PWE2000A-116	Hose Reel (With Clip)	1
PWE2000A-117	Nut	1
PWE2000A-118	Cross Pan Self-Tapping Screw	4
PWE2000A-119	Hose Reel Big Stents (Right)	1
PWE2000A-120	Hose Reel Small Stents (Left)	1
PWE2000A-121	Hose Reel Small Stents (Right)	1
PWE2000A-122	Cross Pan Self-Tapping Screw	6
PWE2000A-123	Cross Pan Self-Tapping Screw	4
Handle Assy		

2000 PSI Pressure Washer

Complete Machine

Parts No.	DESCRIPTION	QTY.
PWE2000A-124	Cross Pan Self-Tapping Screw	6
PWE2000A-125	Cross Pan Self-Tapping Screw	2
PWE2000A-126	Handle (Front)	1
PWE2000A-127	Handle (Back)	1
PWE2000A-128	Iron Pipe	2
Cable Assy		
PWE2000A-129	Tension Disc	1
PWE2000A-130	Microswitch Wire Jacket	1
PWE2000A-131	Cable	1
PWE2000A-132	Cable Jacket	1
PWE2000A-133	Plastic Jacket (Soft)	2
PWE2000A-134	Plate (Line)	2
PWE2000A-135	Cable With GFCI	1
PWE2000A-136	Plastic Jacket	1
PWE2000A-134	Plastic Jacket	1
PWE2000A-135	Plastic Jacket (Soft)	1
PWE2000A-136	Cross Pan Self-Tapping Screw ST4x12 F	2
Acc.		
PWE2000A-137	4 In 1 Lance	1
PWE2000A-138	P2006 Gun	1
PWE2000A-139	Nozzle Cleaner	1
PWE2000A-140	25' HP With Long Ring Nut (Black)	1
PWE2000A-141	Inlet Conntor	1
PWE2000A-142	Soap Bottle	1
PWE2000A-143	Soap Bottle Cap	1
PWE2000A-144	Inlet Cover	1
PWE2000A-145	Inlet Filter	1

本页为封底，此处2行文字不要印刷！！！！
右下角英文需要印刷！！！！